

## SEAT TILT FIX

First it would be best if U could take the seat out of the car, but if U cant its still OK.



The first step is to remove the seat handle.



Take a knife, or a sharp object and lift the plastic cover of the handle.

These files are free for private use, hosting them on web sites is allowed only by contacting the author.

Files were made by **SvenJTD** ( <http://free-zg.t-com.hr/svenjtd/> ), a member of

BOO – Bravo/a owners organization  ( [www.fiatboo.co.uk](http://www.fiatboo.co.uk) )



Unscrew the screw that holds the handle (red) and pull the handle off – to your self.



Now U have to unscrew the two screws (red) that hold the cower.

These files are free for private use, hosting them on web sites is allowed only by contacting the author.  
Files where made by **SvenJTD** ( <http://free-zg.t-com.hr/svenjtd/> ), a member of

BOO – Bravo/a owners organization  ( [www.fiatboo.co.uk](http://www.fiatboo.co.uk) )



After that U are done on this side of the seat. Go to the back of the seat and lift the fabric ends up.



After pulling the fabric, U will see a plastic line. The line is a hook.



Unclip the plastic line on the ends (red) by pulling it down and than to your self.



Insert a big flat head screwdriver under the plastic and holding the fabric (red) push the screwdriver up.





After doing that, U will unclip the front side hook from the rear side hook.  
Looks like these when its unclipped.



The next step is to unclip the rope holders (red) by pulling them up.



The last thing to do is to pull out the plastic line whit the fabric out of the metal clip (red).

When U have done that, just push the lower hook in front of the seat, so only the rear hook remains on the rear side.

Hold the sides of the seat, I mean the fabric and pull the fabric up.  
And that's it. The seat cover is removed from the seat.


These files are free for private use, hosting them on web sites is allowed only by contacting the author.

Files where made by SvenJTD ( <http://free-zg.t-com.hr/svenjtd/> ), a member of

BOO – Bravo/a owners organization  ( [www.fiatboo.co.uk](http://www.fiatboo.co.uk) )



Joining the above stated metal clip back together can be done with cable ties, like this.

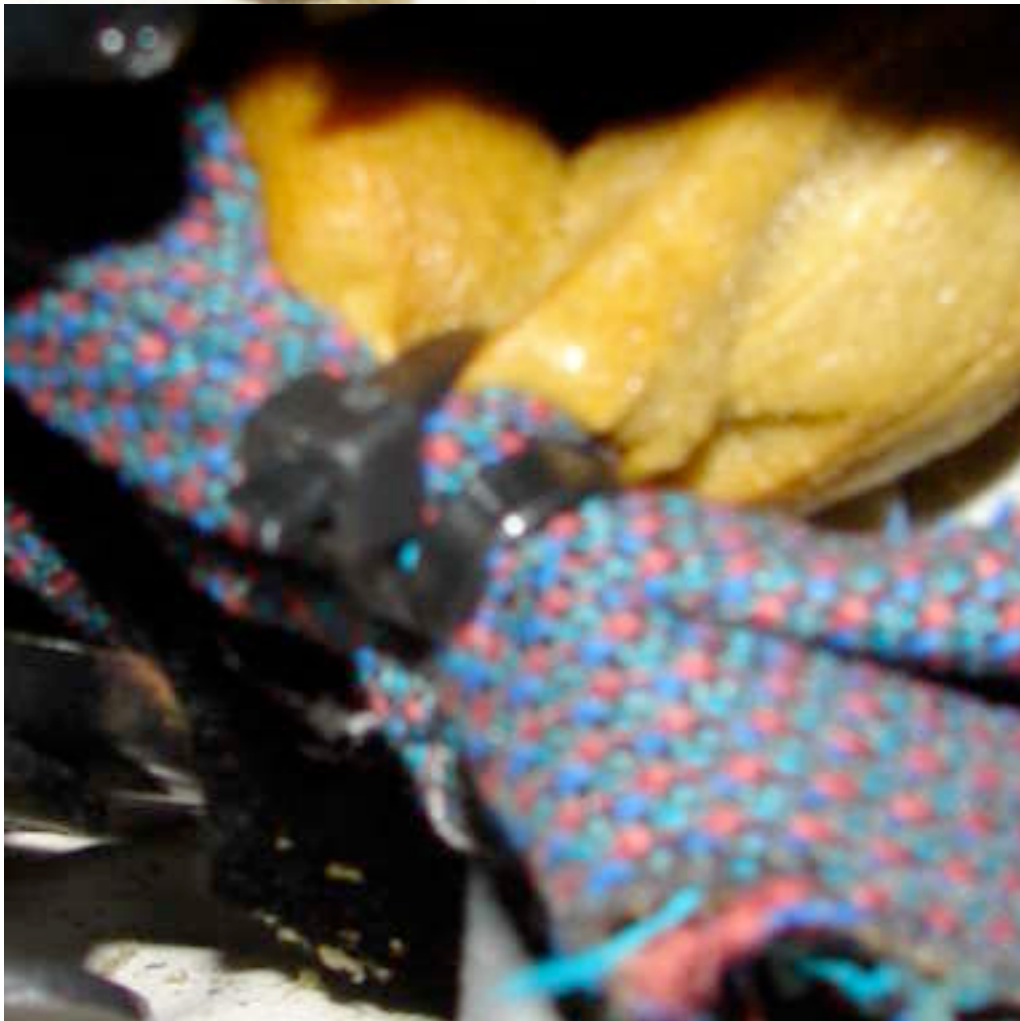

These files are free for private use, hosting them on web sites is allowed only by contacting the author.  
Files were made by **SvenJTD** ( <http://free-zg.t-com.hr/svenjtd/> ), a member of

BOO – Bravo/a owners organization  ( [www.fiatboo.co.uk](http://www.fiatboo.co.uk) )

## FIXING THE TILT OPTION

After removing the seat cover like above.

U will see a steel cable, after pushing the sponge aside (on the side where the tilt lever is).

The steel cable should have Z looking bits on the ends, if it doesnt its broken - U need a new one. Or buy some steel cable the same thickness and some steel cable ties and make loops through the holes and fix them together.

If not its prob. fallen out, so just simply putt it in the holes.

The hole on the tilt lever is the nr. 1 hole



and the other is on the teeth wheel down from the tilt lever.



These files are free for private use, hosting them on web sites is allowed only by contacting the author.

Files where made by **SvenJTD** ( <http://free-zg.t-com.hr/svenjtd/> ), a member of

BOO – Bravo/a owners organization  ( [www.fiatboo.co.uk](http://www.fiatboo.co.uk) )